



GRAIN SPREADERS


SPREDWAY®

- Patented pre-spread disc and inner ring, standard on all Spredways (Patent No. 8,123,452)
- Optional pre-spread funnel
- Totally-enclosed, continuous-duty motors
- **Standard**
 - 3,000 BPH
 - 1/2 HP motor
 - Fits up to 33' diameter bins
- **High-Capacity**
 - 3,000 - 5,000 BPH
 - 3/4 HP motor
 - Fits up to 48' bins
- **Super High-Capacity**
 - 5,000 - 7,000 BPH
 - 1 1/2 HP motor
 - Fits up to 60' diameter bins



GRAVITY SPREADER

- For motor free spreading
- Up to 10,000 BPH
- Two sizes
 - 21' - 30' diameters
 - 30' - 105' diameters
- No motors or cords
- Unit rotates in response to grain flow, providing uniform distribution of fines

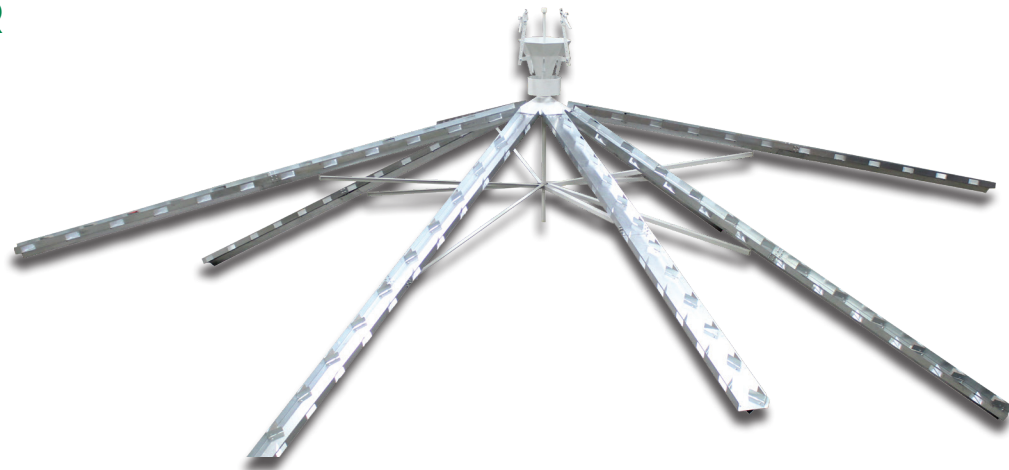

Sukup Manufacturing Co. ■ www.sukup.com

Box 677 ■ 1555 255th Street ■ Sheffield, Iowa 50475-0677 ■ ph 641.892.4222 ■ fx 641.892.4629 ■ info@sukup.com

Distribution Centers

Cameron, MO 64429
7426 NE 352nd St.
ph 816.649.2226
missouri@sukup.com

Arcola, IL 61910
980 E. State Rte. 133
ph 217.268.3026
illinois@sukup.com

Aurora, NE 68818
1705 Hwy. 34 E.
ph 402.694.5922
nebraska@sukup.com

Defiance, OH 43512
7724 Rte. 66 N.
ph 419.784.9871
ohio@sukup.com


Jonesboro, AR 72403
204 Best Industrial Dr.
ph 870.932.7547
arkansas@sukup.com

Watertown, SD 57201
2701 Piper Ave.
ph 605.882.6697
southdakota@sukup.com

SPREDWAY® FEATURES


EASILY ADJUSTABLE PAN


- The angle of the spreader pan can be easily adjusted from the top to control the grain distribution pattern
- Adjustable pan for different bin diameters
- A Split Spreader Pan (standard) divides the grain discharge resulting in a more evenly balanced flow, which makes the spreader operate more smoothly
- Tools available for easy adjustment

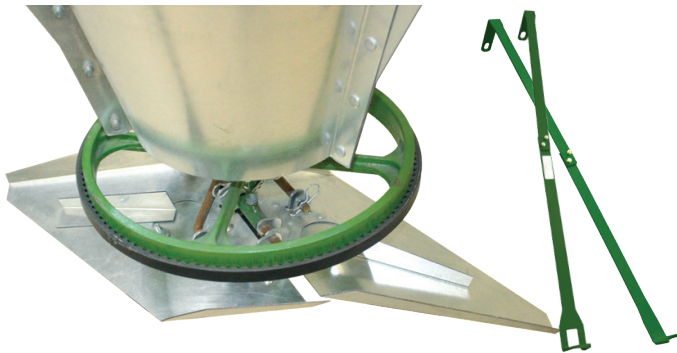

UNIFORM GRAIN FLOW

The standard pre-spread disc and ring combine to maximize fine distribution

 Pre-Spreader Patent No. 8,123,452

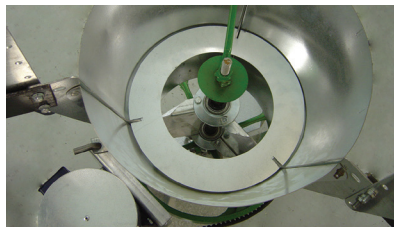

PRE-SPREAD FUNNEL

The Pre-Spread Funnel is an optional accessory that directs grain to the center of the Spredway's pre-spread disc, creating more uniform spreading action.



DEPENDABLE

- A machined pulley to ensure that the drive belt remains in position
- No gearbox makes the Spredway® more dependable
- Sealed bearing with no maintenance required

RIGID MOUNTING BRACKETS

- Special, two-piece design allows for vertical and horizontal adjustment to level the spreader
- The rigid mount prevents spreader movement
- Additional hanger brackets are available for mounting in bins that are not compatible with rigid brackets



GRAIN FLOW UNOBSTRUCTED

Mounting the motor outside of the spreader cone does not hamper grain flow and prevents overheating the motor.

TOTALLY ENCLOSED, HIGH HORSEPOWER MOTOR

To ensure optimum performance, horsepower ratings for different models are listed in the chart below.

SPREDWAY SPECIFICATIONS							
MODEL	CAPACITY - BPH	MOTOR SIZE	PRE-SPREAD DISC DIA.	SPREADER PAN STYLE	MOTOR PULLEY DIA.	CONE	BIN DIA.
Standard	Up to 3,000	1/2 HP	3 1/2"	Split	1 3/4"	19" x 12"	18' - 33'
High-Capacity	3,000 - 5,000	3/4 HP	3 1/2"	Split	2 1/4"	19" x 12"	24' - 48'
Super High-Capacity	5,000 - 7,000	1 1/2 HP	8"	Split	2 1/4"	19" x 13"	36' - 60'